

Technical Data Sheet

CODE 11542

QE 100/60 LL TP HCS

Centrifugal duct fans



Certifications

CE CE

TUV TUV


DIBt DIBt

CB TEST CERTIFICATE

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Airflow at 1st speed (m ³ /h)	60
Insulation class	II°	Max airflow at Max speed (l/s)	27,8
IP	45	Max airflow at Max speed (m ³ /h)	100
Max absorbed current at Max speed (A)	0,17	Max pressure at Max speed (mmH20)	36
Max absorbed current at Min speed (A)	0,14	Max pressure at Max speed (Pa)	353
Max absorbed power at Max speed (W)	26	Max RPM	1570
Max ambient temperature for continuous operation (°C)	50	Min RPM	1170
Nominal diameter (mm)	80	Pressure at 1st speed (mmH20)	35
∅ Discharge hole (mm)	70	Pressure at 1st speed (Pa)	343
Power absorbed at 1st speed (W)	16	Sound power at Min speed LWA [dB(A)]	43
Voltage (V)	220-240	Sound power at Min speed LWA [dB(A)]	48
Weight (Kg)	2,33	Sound pressure at 3m at Max speed calculated in free field Lp [dB(A)]	30,5
Airflow at 1st speed (l/s)	16,7	Sound pressure at 3m at Min speed calculated in free field Lp [dB(A)]	25,5

DIMENSIONS

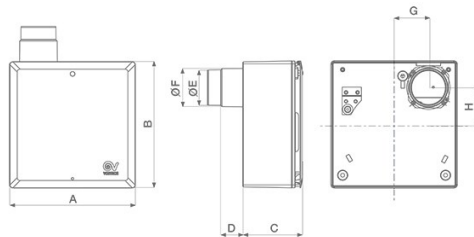

Size A (mm)	262
Size B (mm)	262
Size C (mm)	115,5
Size D (mm)	80
Size E (mm)	73
Size F (mm)	79
Size G (mm)	71,5
Size H (mm)	90

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 11542

QE 100/60 LL TP HCS

Centrifugal duct fans



DESCRIPTION

- Scroll and front panel made of self-extinguishing ABS, rated V0.
- Motor housing and filter frame made of ABS plastic.
- 2 speed AC motor, shaft on ball bearings, coupled to a forward curved centrifugal impeller, PBT made.
- Nominal airflows: 100 / 60 m³/h
- G2 filter, with a clogged filter mechanic alarm fully compliant with ErP reg. N° 1253/2014/UE, in force since 1st January 2018.
- Timer EVO mode: the switching on/off of the extractor fan is realized through the light control; the on-board electronic allows to set, during the installation, the starting/stopping delay when the product is switched on/off (the respective delays can be set at 0, 45, 90 or 120 seconds and at 6, 10, 15 or 21 minutes).

HCS mode: the switching on/off of the extractor fan is realized according with ambient relative humidity values detected by the HCS sensor (Humidity Control System) integrated in the on-board electronic. The system operates with two different modes, ensuring the best environmental conditions:

o Exceeding the threshold: the product starts to run when ambient


relative humidity exceeds a given threshold, which can be set by the installer at four values: 60%, 70%, 80%, 90% RH (70% is the factory setting). The fan stops its running when the RH level falls below the 15% of the pre-set RH value, or after two hours of continuous running.

o Rapid increase of the RH value: the product automatically starts as a result of a sudden RH increase (> 20% in 10 minutes), and immediately stops to extract air when the RH level falls below the 15% of the pre-set RH value, or after two hours of continuous running.

o Possibility of connection to an external switch to manually control the product, independently from the HR value detected in the air (for example to avoid the switch on of the extractor fan when the outdoor humidity is too high).

o Is also possible to set, during the installation, the continuous running operation mode at minimum speed (Continuous Ventilation of the room), moving to the higher speed selection through the switching on/off of the light control and so to the values detected by the HR sensor (Boost mode).

CURVES

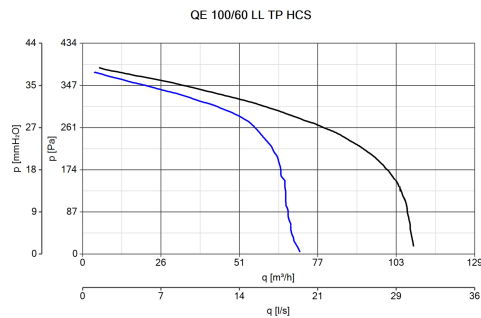

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND
Sales Dept:
sales@vortice.ltd.uk
Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
After Sales:
after-sales@vortice-italy.com