




Range of large diameter portable cooling fans specially designed to offer a powerful and uniform distribution of air. Metallic impeller dynamically balanced. TURBO-3000 is equipped with thermal protection, IP54, with a guaranteed life of 30.000 hours.

Applications

Domestic, commercial and industrial clean environments.


- Ventilation of one or several rooms in residential dwellings, offices and retail outlets.
- Ventilation applications in foundries, steel mills, glass factories, ...
- Engine, compressor and transformer cooling.
- Paint line drying applications.
- Heat dissipation in the workplace.



Carrying hundle. Adjustable fan position.
 Proof guard (detachable).



High performance impeller.
 The special impeller design delivers a high volume airflow for commercial or industrial environments.

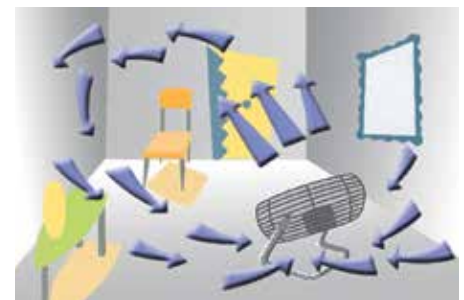

Ventilation of one or several rooms in residential dwellings, offices and retail outlets.

TECHNICAL CHARACTERISTICS

Model	Voltage 50Hz (V)	Power (W)	Airflow* (m³/h)	Speed (rpm)	Sound pressure level** (dB(A))	Switch ON/OFF	Thermal protection	Colour	Weight (kg)	Ø Impeller (mm)	Cable length (mm)	Dimensions LxWxH (mm)	Wiring diagram (nº)
TURBO-3000	230	130/40	10.362 / 6.600	1400/900	57/52	•	•	Chrome	8	350	2500	440x280x480	36

* According to IEC 60879 regulation.
 ** Measured at 1,5 m.